



Book spine gluing with PUR adhesive




GLUING SOLUTIONS

Binding with PUR adhesives:

- Better adhesion than with traditional adhesives.
- Books lie flat when they are open.
- Greater flexibility of the book assembly.
- Full grip to prevent pages from being pulled out.
- Not affected by ink migration.
- No failure at extreme temperatures between -40°C and 100°C.
- Prevention of wrinkling on the spine, as it is applied at a lower temperature.
- More malleable, allowing the paper fibres to return to their original orientation.
- PUR adhesives are resistant to solvents and oils.

Application advantages:

- Application thicknesses between 0.3 and 0.4 mm, half of that in traditional applications.
- Prevention of overflows dirtying up the cutting blades.
- Applied with an adjustable-width lamination applicator.
- Better cleaning and less maintenance than with roller systems.
- Perfect adhesive preservation, with the use of dry air or nitrogen (inert atmosphere).
- With milled books it avoids the costly stitching operation.

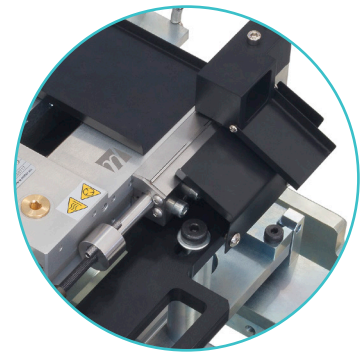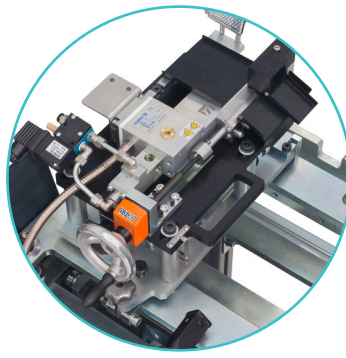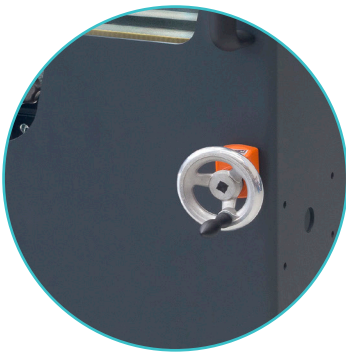


TECHNICAL CHARACTERISTICS

- Adjustable width coating applicator (0-60 mm or 0-100 mm) with fast cut-off injector:
 - pneumatic control solenoid valve.
 - anti-drop tray.
- Pattern control to run the application according to the book length:
 - book detection photocell to start cycle.
 - encoder for programming the length in mm.
- Holding and adjusting support to set the applicator in position (*)
- Trolley system for applicator-support assembly (*)

(*) This elements must be designed according to the machine characteristics (brand and model) where the system will be installed.

DIMENSIONS

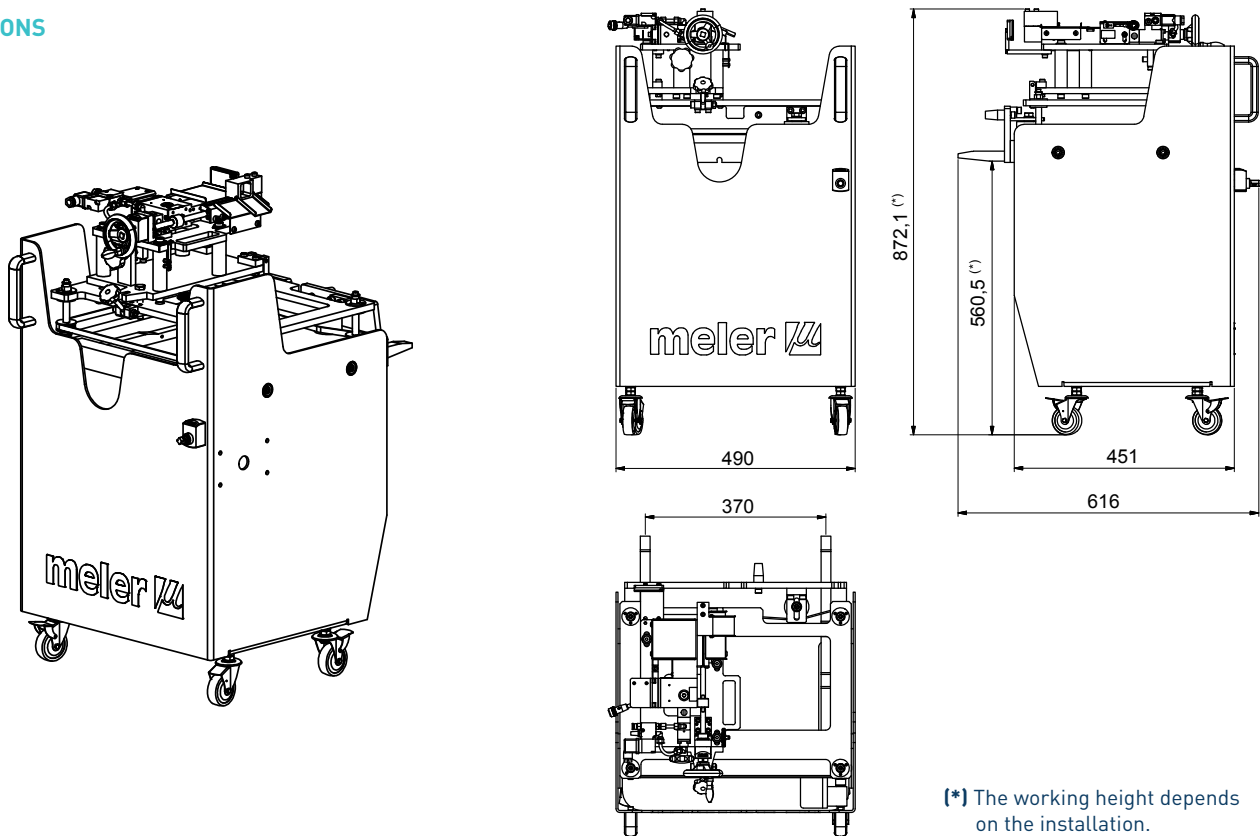

(*) The working height depends on the installation.

For more information speak with your Focke Meler representative:

meler 

Focke Meler Gluing Solutions, S. A.

Pol. Los Agustinos, c/G, nave D-43
E-31160 Orkoien - Navarra - Spain
Phone: +34 948 351 110
Fax: +34 948 351 130
info@meler.eu - www.meler.eu

A Focke Group Company



Management System
ISO 9001:2008
www.tuv.com
ID 9105030748

